
## WATER SOFTENERS AND PRESSURE PUMPS WATER TREATMENT

## HOBART

## Water Treatment Unit - Economy Version

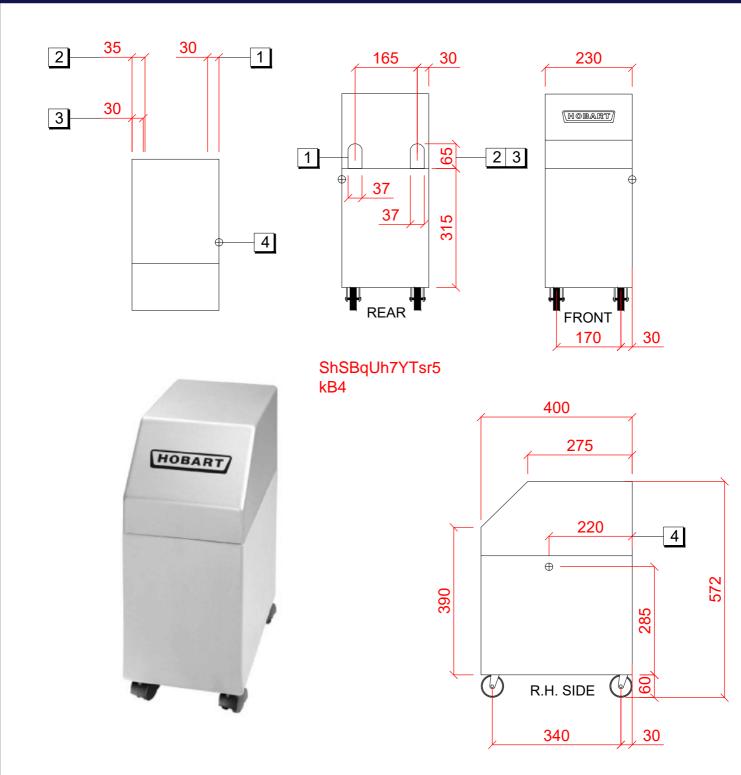

12 Water	34 Drain	Electric
<ol> <li>INLET: 1.5 METRE HOSE WITH 3/4" B.S.P. FEMALE TERMINATION. 2°C MIN TO 65°C MAX. 2.0 TO 6.0 BAR.</li> <li>OUTLET: 1.5 METRE HOSE WITH 3/4" B.S.P. FEMALE TERMINATION.</li> </ol>	<ol> <li>PUMPED DRAIN: 1/2" BARBED FITTING FOR CONNECTION TO HOSE (NOT SUPPLIED) AND THEN TO A 40mm TRAPPED STANDPIPE AT 700mm AFFL</li> <li>OVERFLOW: 1/2 " BARBED FITTING</li> </ol>	230/50/1 13amp FUSED SPUR. 2 METRE CABLE SUPPLIED. <b>SPECIAL NOTE:</b> ELECTRICAL INSTALLATIONS SHOULD COMPLY WITH CURRENT REGULATIONS.
	(THIS IS A VISIBLE SIGN OF ANY OVERFLOW AND SHOULD NOT BE CONNECTED IN SUCH	INDIES
WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE	A WAY AS NOT TO BE VISIBLE)	NOMINAL SALT CAPACITY 10kg SALT TABLETS ONLY- NOT GRANULAR OR POWDER

PLOT SCALE: 1:10

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED

SE-H